


ELECTRICAL CONNECTION INSTRUCTIONS

Preferred Power Configuration: 2 LED strings per module each run by dedicated driver or channel. Each string must be powered by constant current driver, 36VDC min output. (The same drivers that power 1000lm XSM can be used for each string).

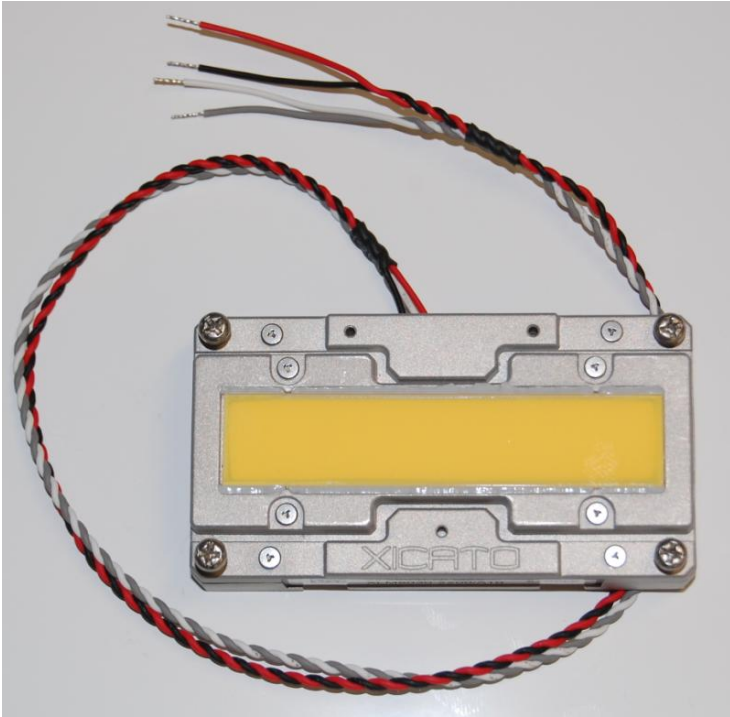


Harness XSA-26-2

String 1: Red (Positive lead),
Black (Negative lead)

String 2: White (Positive lead), Grey (Negative lead)

Secondary Power Configuration: 2 LED strings run in series. Must use a 68V MIN constant current driver or power supply.

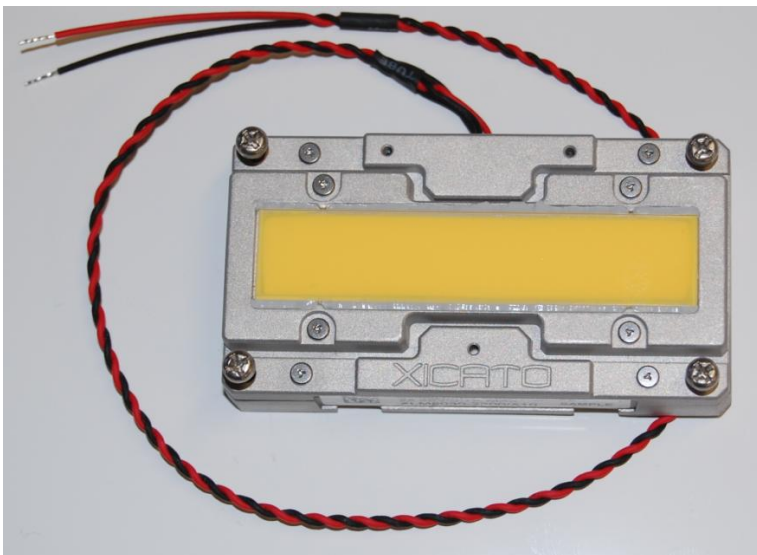

Harness XSA-26-1

Red (Positive lead), Black (Negative lead).