
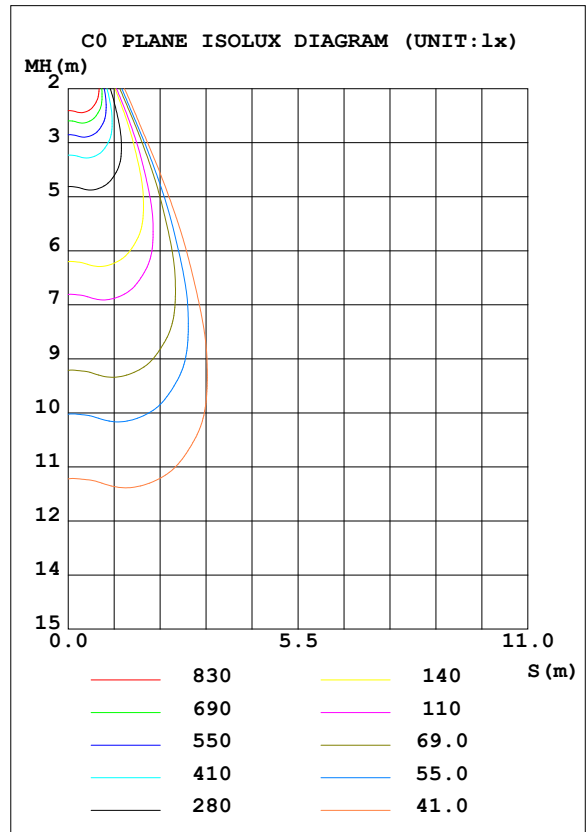


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz		
Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.86 lm/W			
MODEL	XOB CRI 90 3000K	I _{max} (cd)	5762	S/MH (C0/180)	0.70
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.67
RATED VOLTAGE (V)	37	TOTAL FLUX (lm)	3133.1	η UP, DN (C0-180)	0.0, 51.4
NOMINAL FLUX (lm)	3133.06	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 48.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	34.9	η down (%)	100.0	CIBSE SHR MAX	0.50

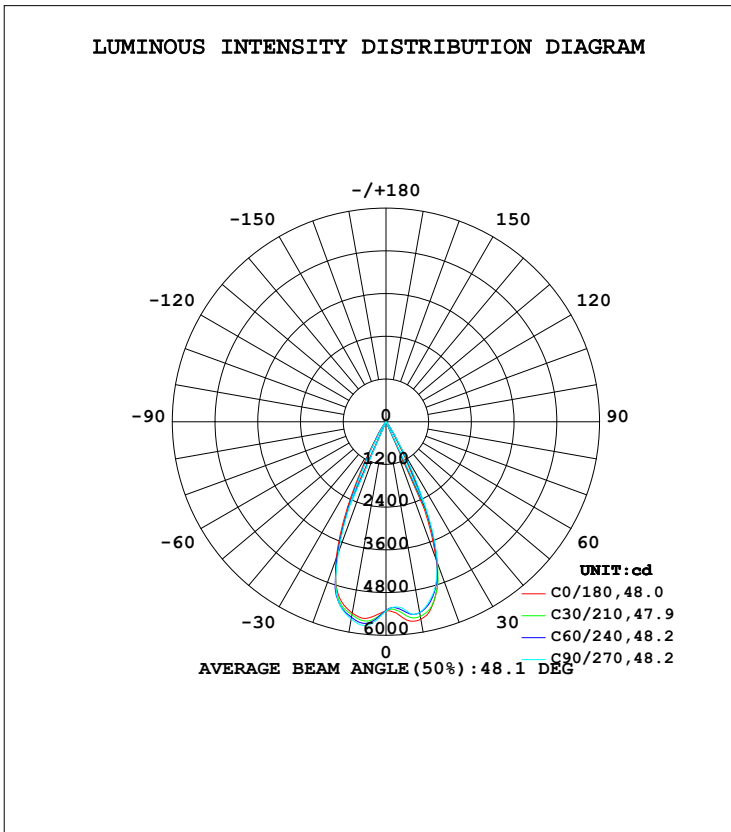

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5636	5499	5441	5394	5459	5544	5631	5646	0- 10	527.5	527.5	16.8,16.8
20	4127	4213	4207	4157	4103	3995	3912	3975	10- 20	1404	1931	61.6,61.6
30	672.6	817.2	975.7	882.9	741.6	615.3	536.3	568.7	20- 30	1023	2954	94.3,94.3
40	50.35	61.20	67.96	70.92	61.55	49.73	40.15	40.40	30- 40	162.8	3117	99.5,99.5
50	2.405	2.705	3.645	3.857	3.659	2.387	1.969	1.988	40- 50	14.34	3131	99.9,99.9
60	0.5400	0.4873	0.5726	0.6429	0.5311	0.4629	0.4499	0.4733	50- 60	1.174	3133	100,100
70	0.1938	0.1591	0.1728	0.2053	0.1312	0.1587	0.1867	0.1675	60- 70	0.2718	3133	100,100
80	0.1614	0.1334	0.1403	0.1412	0.1191	0.1262	0.1281	0.1358	70- 80	0.1541	3133	100,100
90	0.1313	0.1244	0.1175	0.1244	0.1106	0.1175	0.1244	0.1244	80- 90	0.1392	3133	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3128.2 lm

%lum = 99.8%
 %lamp = 99.8%

Conical surface Flux(120deg): 3132.5 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:3128.2 %lum: 99.8%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 3.5%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 5.4%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

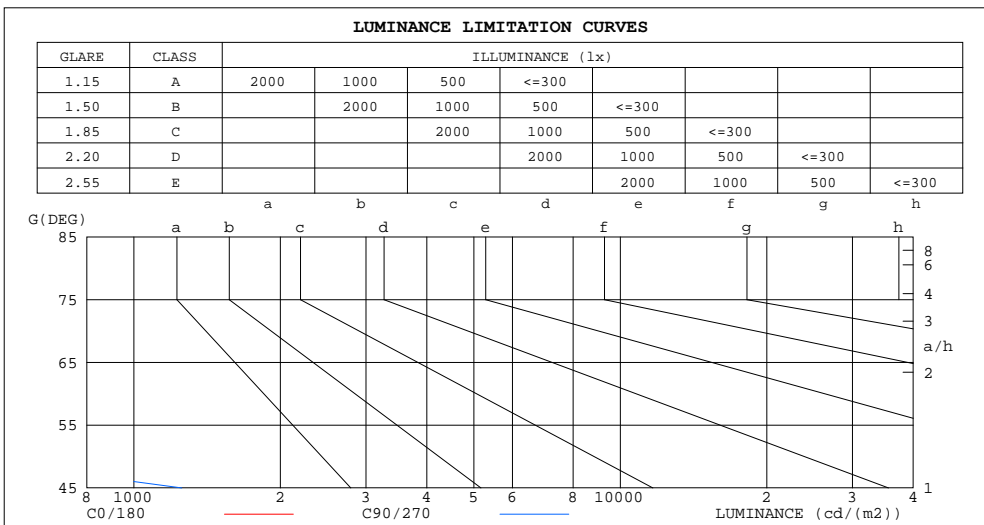

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	81	69
80	45	39
75	33	29
70	28	25
65	34	25
60	52	56
55	105	121
50	182	275
45	863	1254


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	1.00	.99	.98	.97	.95
2.0	1.06	1.03	.90	1.04	1.01	.99	1.01	.99	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.97	.93	.91	.94	.92	.89	.92	.90	.88	.87
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.88	.85	.82	.87	.83	.81	.85	.82	.80	.79
6.0	.87	.82	.78	.86	.81	.78	.85	.81	.78	.83	.80	.77	.82	.79	.77	.75
7.0	.83	.78	.75	.82	.78	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
8.0	.79	.75	.71	.79	.74	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.69
9.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66
10.0	.73	.68	.65	.73	.68	.65	.72	.68	.65	.71	.67	.65	.71	.67	.65	.63

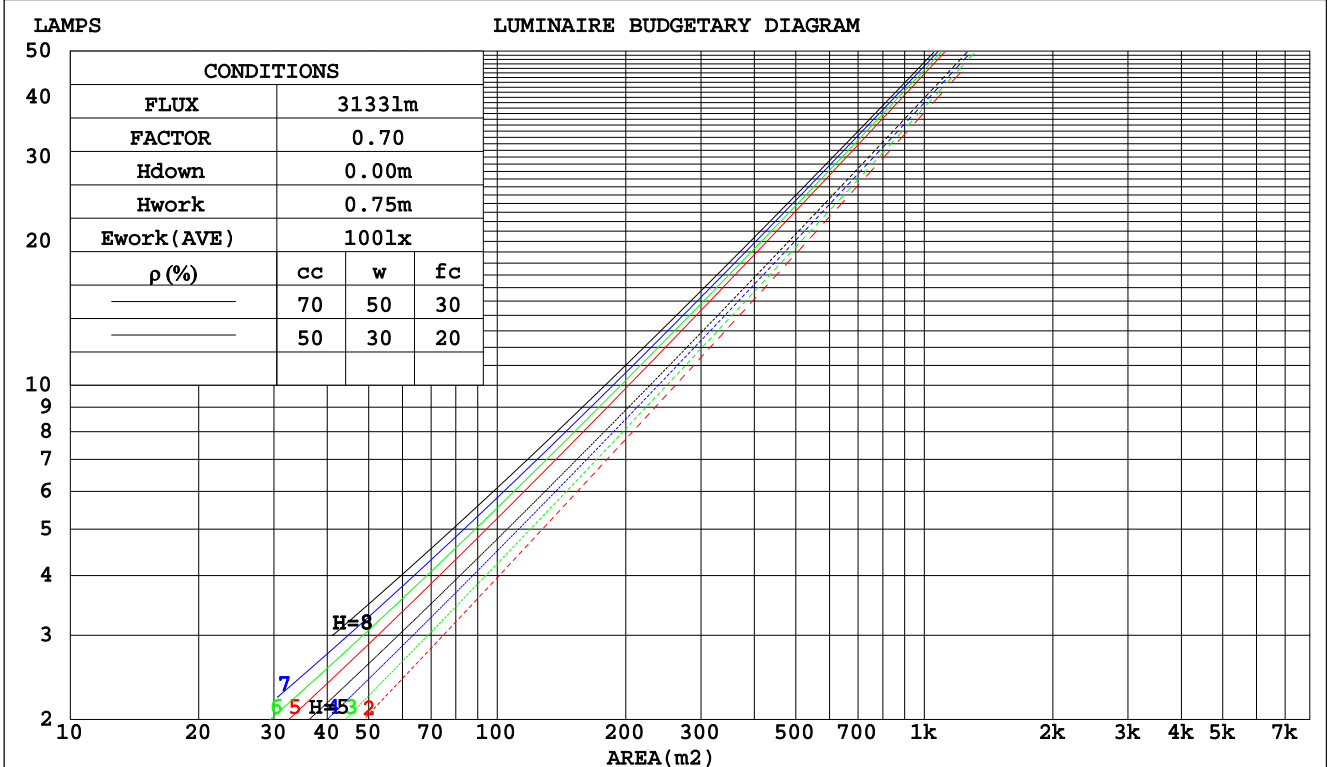

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz		
Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-I49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.153	.087	.027	.146	.083	.026	.133	.077	.024	.122	.070	.023	.111	.065	.021	
2.0	.143	.079	.024	.138	.076	.023	.127	.071	.022	.118	.066	.021	.109	.062	.019	
3.0	.135	.072	.022	.130	.070	.021	.122	.066	.020	.114	.062	.019	.106	.059	.018	
4.0	.128	.066	.020	.124	.065	.019	.117	.062	.018	.110	.059	.018	.103	.056	.017	
5.0	.122	.062	.018	.118	.061	.018	.112	.058	.017	.106	.056	.017	.100	.054	.016	
6.0	.116	.058	.017	.113	.057	.016	.107	.055	.016	.102	.053	.016	.097	.051	.015	
7.0	.111	.055	.016	.108	.054	.015	.104	.052	.015	.099	.051	.015	.095	.049	.014	
8.0	.106	.052	.015	.104	.051	.014	.100	.050	.014	.096	.049	.014	.092	.047	.014	
9.0	.102	.049	.014	.100	.049	.014	.096	.048	.014	.093	.046	.013	.089	.045	.013	
10.0	.098	.047	.013	.097	.047	.013	.093	.046	.013	.090	.045	.013	.087	.044	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.116	.131	.114	.100	.089	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.138	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
7.0	.102	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.005	
8.0	.096	.062	.039	.083	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.091	.057	.034	.078	.049	.029	.054	.035	.021	.032	.020	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.045	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz		
Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.8	4.6	4.1	4.8	4.9	4.9	5.7	5.2	5.9	6.0
3H	3.7	4.4	3.9	4.6	4.8	4.8	5.5	5.0	5.7	5.9
4H	3.6	4.3	3.9	4.5	4.7	4.7	5.4	5.0	5.6	5.8
6H	3.5	4.2	3.8	4.4	4.6	4.6	5.3	4.9	5.5	5.7
8H	3.5	4.1	3.8	4.3	4.6	4.6	5.2	4.9	5.4	5.7
12H	3.4	4.0	3.7	4.3	4.6	4.5	5.1	4.8	5.4	5.6
4H 2H	3.6	4.3	3.9	4.5	4.7	4.7	5.4	5.0	5.6	5.8
3H	3.4	4.0	3.7	4.3	4.5	4.5	5.1	4.8	5.4	5.6
4H	3.3	3.9	3.7	4.2	4.5	4.4	5.0	4.8	5.3	5.6
6H	3.2	3.7	3.6	4.0	4.4	4.3	4.8	4.7	5.1	5.5
8H	3.2	3.6	3.6	4.0	4.3	4.3	4.7	4.7	5.1	5.4
12H	3.1	3.5	3.5	3.9	4.3	4.2	4.6	4.6	5.0	5.4
8H 4H	3.2	3.6	3.6	4.0	4.3	4.3	4.7	4.7	5.1	5.4
6H	3.1	3.4	3.5	3.8	4.2	4.2	4.5	4.6	4.9	5.3
8H	3.0	3.3	3.5	3.8	4.2	4.1	4.4	4.6	4.8	5.3
12H	3.0	3.2	3.4	3.7	4.1	4.1	4.3	4.5	4.8	5.2
12H 4H	3.1	3.5	3.5	3.9	4.3	4.2	4.6	4.6	5.0	5.4
6H	3.0	3.3	3.5	3.8	4.2	4.1	4.4	4.6	4.8	5.3
8H	3.0	3.2	3.4	3.7	4.1	4.1	4.3	4.5	4.8	5.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.3 / -19.1					+ 5.0 / -20.4				
1.5H	+ 7.0 / -17.2					+ 7.7 / -18.4				
2.0H	+ 7.6 / - 8.7					+ 8.5 / -10.4				

CIE Pub.117, 3133 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.0)
 Area: 0.0206015 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-I49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	86	82	91	85	82	90	85	82	79
0.80	98	93	90	98	93	90	96	92	89	86
1.00	102	97	94	101	97	93	100	96	93	89
1.25	105	101	98	104	100	97	103	99	97	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	103	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	111	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz		
Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

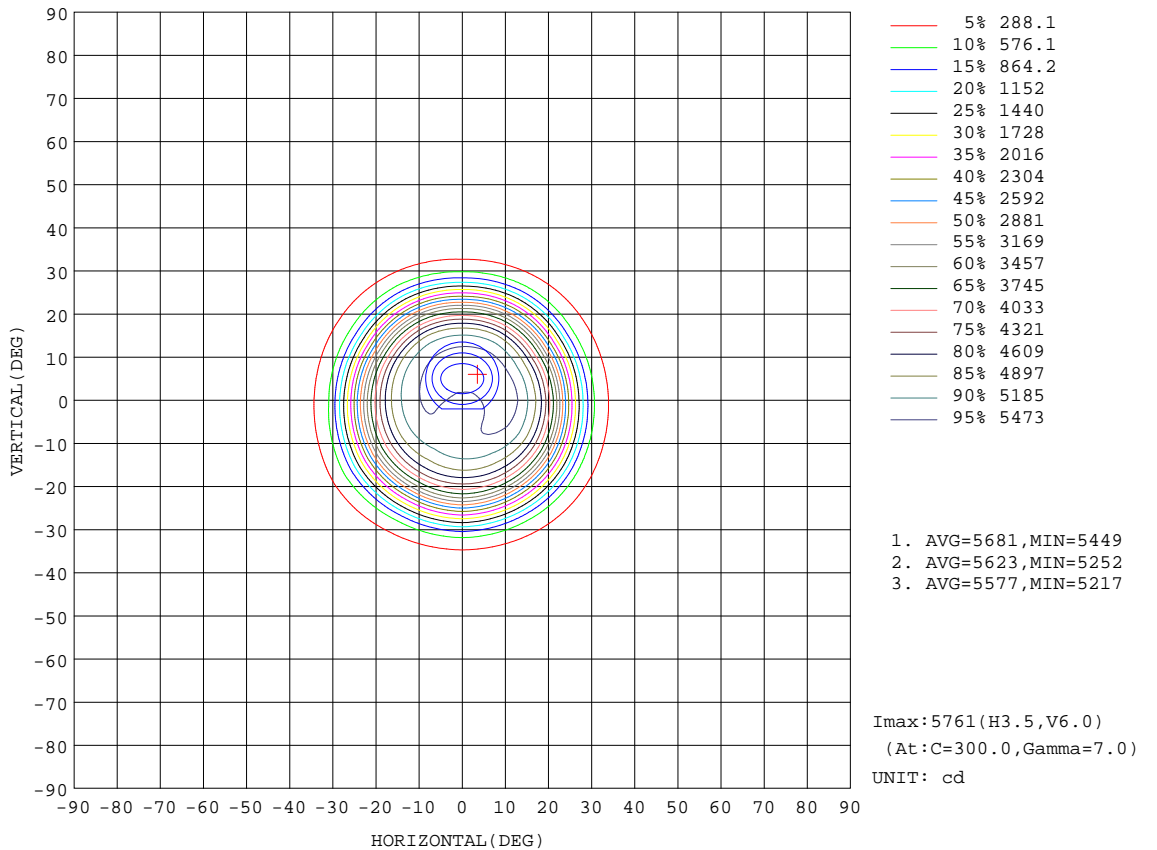


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

AAI Figure

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:2488 lm

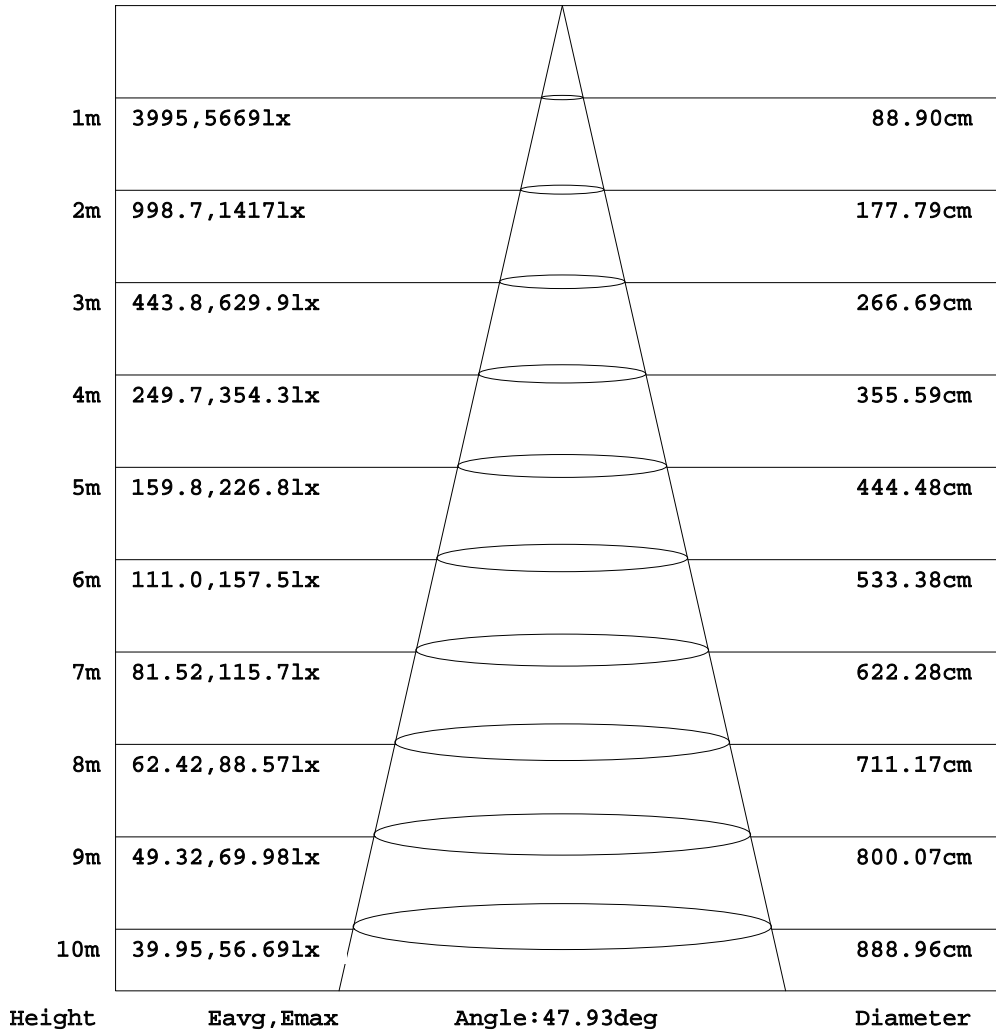


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-10-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

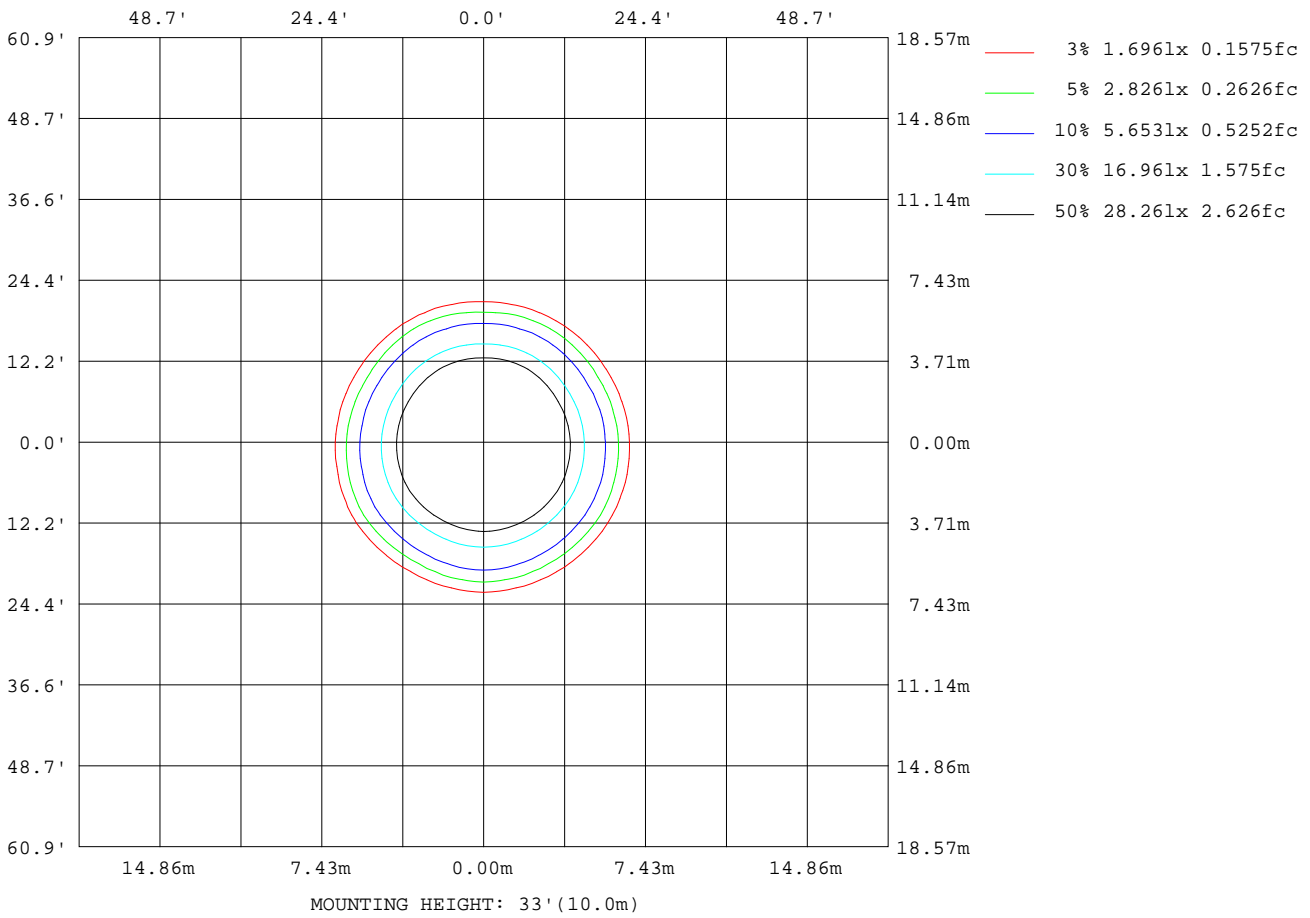

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz		
Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	29
L_0~180 (75) av	28
L_0~180 (85) av	72
L_90~270 (65) av	27
L_90~270 (75) av	27
L_90~270 (85) av	69
L_45 (65) av	28
L_45 (75) av	26
L_45 (85) av	71

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

Planar Illuminance Curve

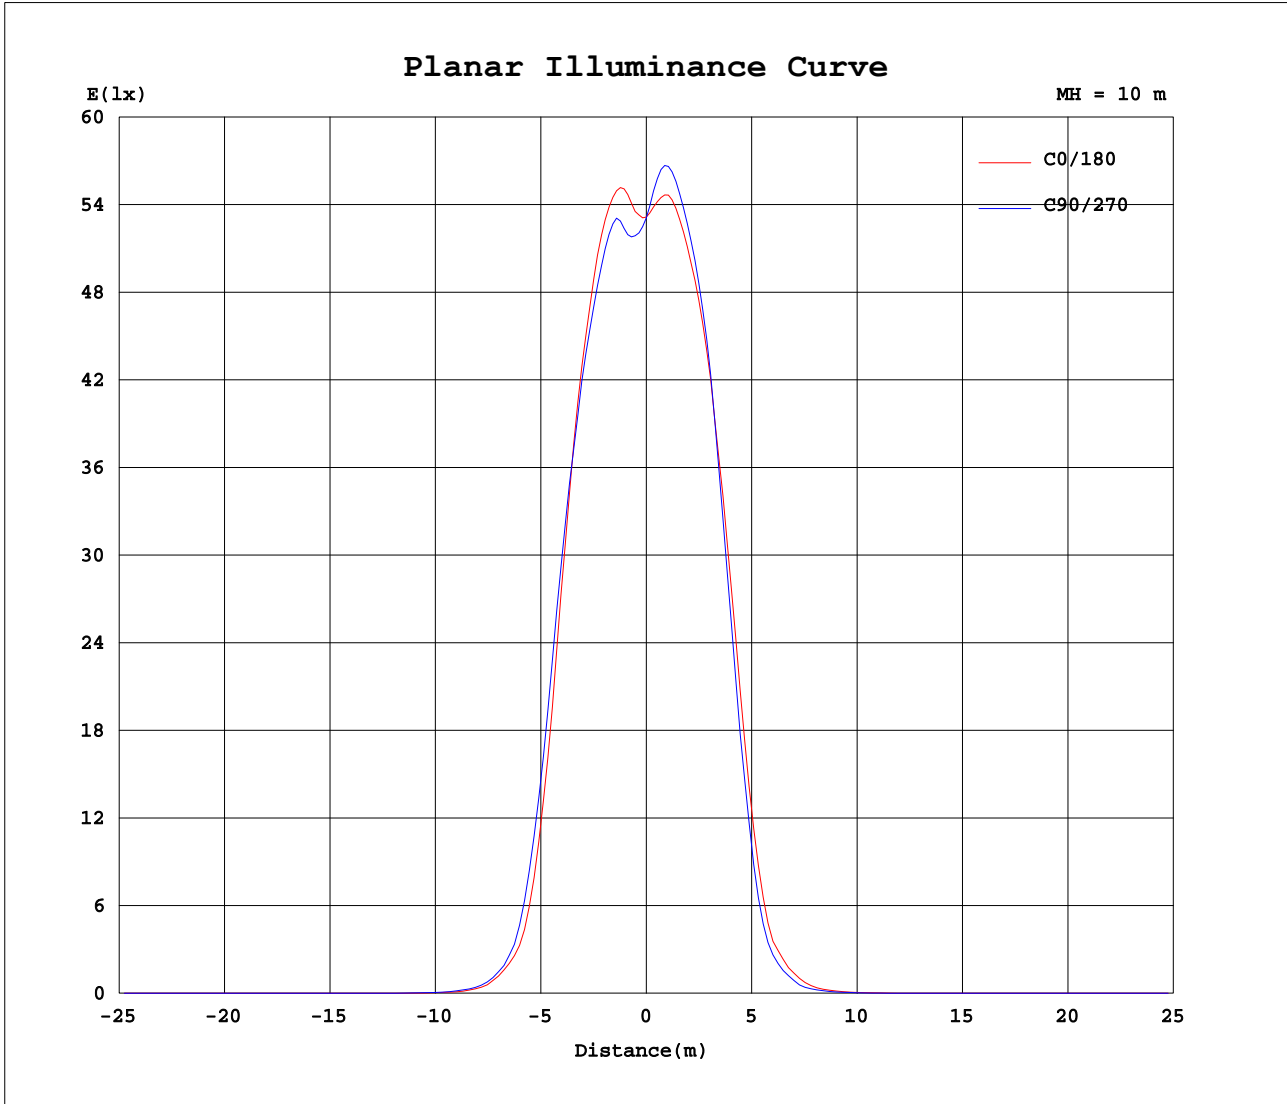

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-10-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:34.900V I:0.8990A P:31.375W PF:1.0000 Freq:0Hz Lamp Flux:3133.06x1 lm		
NAME: XDL E6-WRA-L49030-50DW	TYPE: Downlight	SERIAL No.:
SPEC.: XOB CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	5315	5317	5297	5310	5286	5282	5315	5317	5297	5310	5286	5282						
5	5533	5399	5315	5255	5301	5383	5530	5613	5674	5734	5727	5643						
10	5636	5550	5447	5441	5381	5407	5459	5508	5580	5631	5660	5633						
15	5214	5208	5084	5042	4993	5065	5092	5154	5209	5198	5227	5163						
20	4127	4233	4194	4207	4146	4167	4103	3990	4000	3912	3996	3954						
25	2168	2389	2472	2602	2471	2511	2332	2105	2065	1972	2039	2006						
30	673	780	854	976	870	896	742	628	602	536	573	565						
35	217	243	256	269	256	285	252	208	179	161	157	182						
40	50.3	60.1	62.3	68.0	69.6	72.2	61.5	52.2	47.3	40.2	40.1	40.7						
45	12.6	14.4	15.6	18.3	18.8	20.1	18.3	15.6	14.1	11.9	11.2	10.7						
50	2.41	2.56	2.85	3.65	3.65	4.06	3.66	2.61	2.16	1.97	2.02	1.95						
55	1.25	1.24	1.31	1.43	1.51	1.47	1.28	1.20	1.07	1.07	1.12	1.08						
60	0.54	0.46	0.52	0.57	0.66	0.62	0.53	0.52	0.41	0.45	0.46	0.48						
65	0.30	0.18	0.23	0.21	0.30	0.28	0.21	0.26	0.19	0.26	0.23	0.28						
70	0.19	0.15	0.17	0.17	0.23	0.18	0.13	0.19	0.13	0.19	0.16	0.18						
75	0.18	0.14	0.14	0.16	0.14	0.16	0.13	0.13	0.13	0.13	0.15	0.14						
80	0.16	0.14	0.13	0.14	0.14	0.14	0.12	0.13	0.13	0.13	0.14	0.13						
85	0.15	0.13	0.13	0.12	0.13	0.13	0.11	0.12	0.13	0.13	0.13	0.13						
90	0.13	0.12	0.12	0.12	0.13	0.12	0.11	0.12	0.12	0.12	0.12	0.12						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-10-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks: