
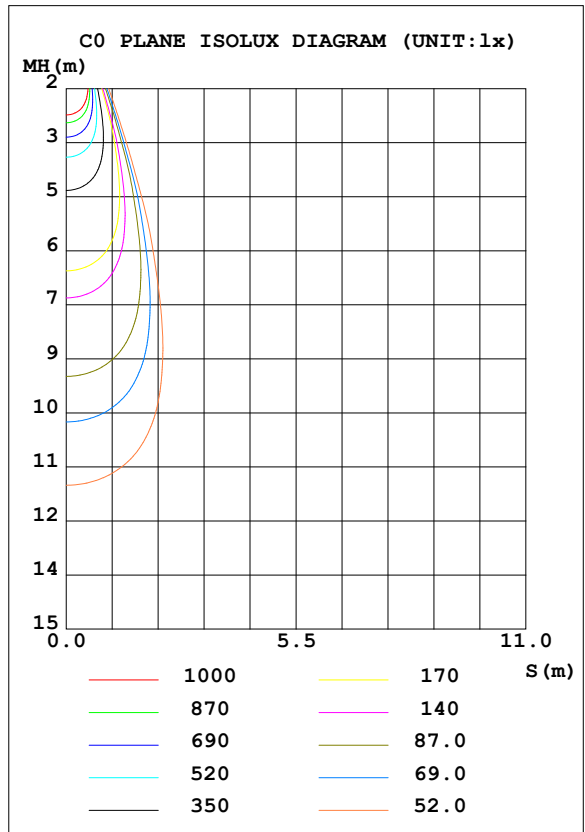


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.71 lm/W			
MODEL	XICATO-3000K	I _{max} (cd)	6946	S/MH (C0/180)	0.59
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	0.49
RATED VOLTAGE (V)	30	TOTAL FLUX (lm)	2466.1	η UP, DN (C0-180)	0.0,55.3
NOMINAL FLUX (lm)	2466.12	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,44.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	26.7	η down (%)	100.0	CIBSE SHR MAX	0.55

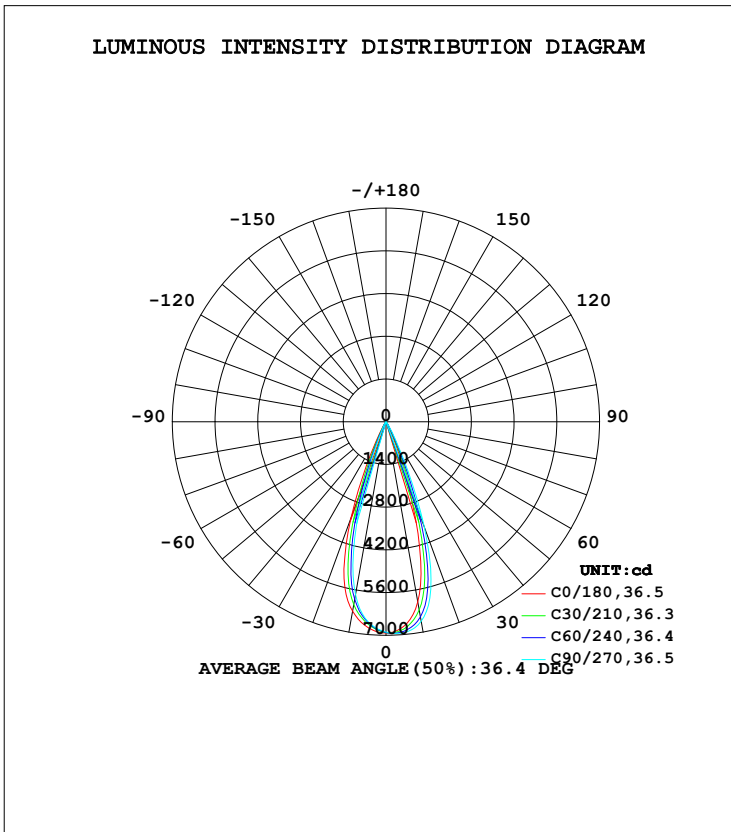

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	5997	6378	6641	6561	6308	5999	5760	5841	0- 10	627.2	627.2	25.4,25.4
20	1930	2814	3665	3870	3369	2382	1713	1626	10- 20	1274	1901	77.1,77.1
30	157.3	242.7	409.2	429.0	314.0	201.4	147.9	138.9	20- 30	476.4	2377	96.4,96.4
40	40.12	50.99	62.70	67.18	61.09	49.72	40.28	36.75	30- 40	70.96	2448	99.3,99.3
50	1.743	2.714	4.601	6.138	5.437	3.426	1.941	1.608	40- 50	16.26	2465	99.9,99.9
60	0.3747	0.4149	0.5021	0.6085	0.5288	0.4250	0.3406	0.3025	50- 60	1.161	2466	100,100
70	0.1634	0.1320	0.1281	0.1190	0.1282	0.1257	0.1360	0.1156	60- 70	0.2029	2466	100,100
80	0.1120	0.1081	0.1127	0.0963	0.1133	0.1006	0.0952	0.0952	70- 80	0.1151	2466	100,100
90	0.1020	0.1020	0.1020	0.0952	0.1088	0.0986	0.0952	0.0952	80- 90	0.1098	2466	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2460.7 lm

%lum = 99.8%
 %lamp = 99.8%

Conical surface Flux(120deg): 2465.7 lm

%lum = 100.0%
 %lamp = 100.0%

0 - 45 DEG Zonal Flux:2460.7 %lum: 99.8%
 135 - 180 DEG Zonal Flux:0 %lum: 0.0%


All measured values may vary less than 35 %
 from the average measured value in the 0 to 130 deg. zone: 3.2%
 All measured values in the 0 to 130 deg. zone
 may vary less than 50% from the average value of itself: 5.0%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

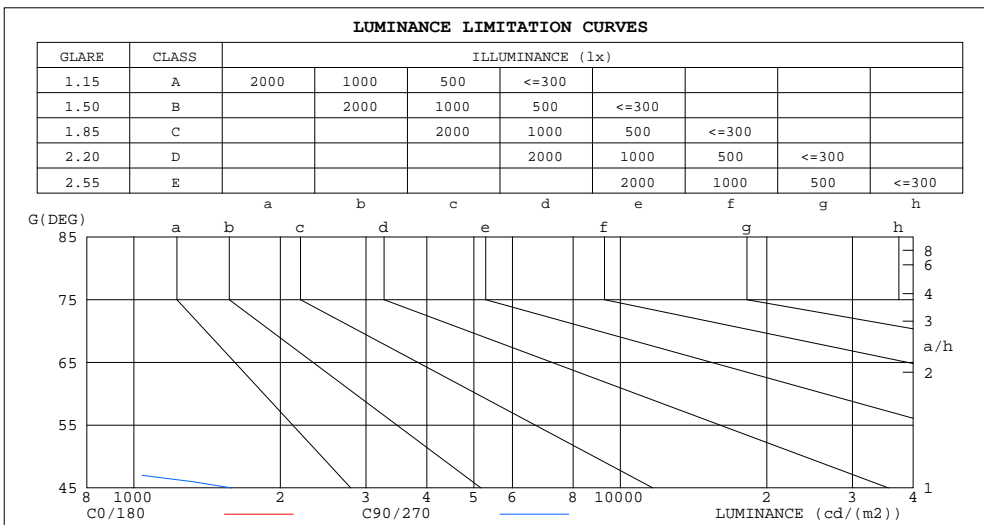

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	61	59
80	31	32
75	21	23
70	23	18
65	24	16
60	36	49
55	84	115
50	132	347
45	814	1588


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.03	1.00	1.02	1.00	.98	.99	.98	.96	.97	.95	.94	.93
3.0	1.02	.98	.96	1.01	.98	.95	.98	.96	.93	.96	.94	.92	.94	.92	.91	.89
4.0	.98	.94	.91	.97	.93	.90	.95	.92	.89	.93	.90	.88	.91	.89	.87	.86
5.0	.94	.90	.87	.93	.89	.86	.92	.88	.85	.90	.87	.85	.89	.86	.84	.83
6.0	.90	.86	.83	.90	.86	.83	.88	.85	.82	.87	.84	.82	.86	.83	.81	.80
7.0	.87	.83	.80	.87	.82	.79	.85	.82	.79	.84	.81	.79	.83	.81	.78	.77
8.0	.84	.80	.77	.84	.79	.77	.83	.79	.76	.82	.78	.76	.81	.78	.76	.75
9.0	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.79	.76	.73	.72
10.0	.79	.74	.72	.78	.74	.71	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70

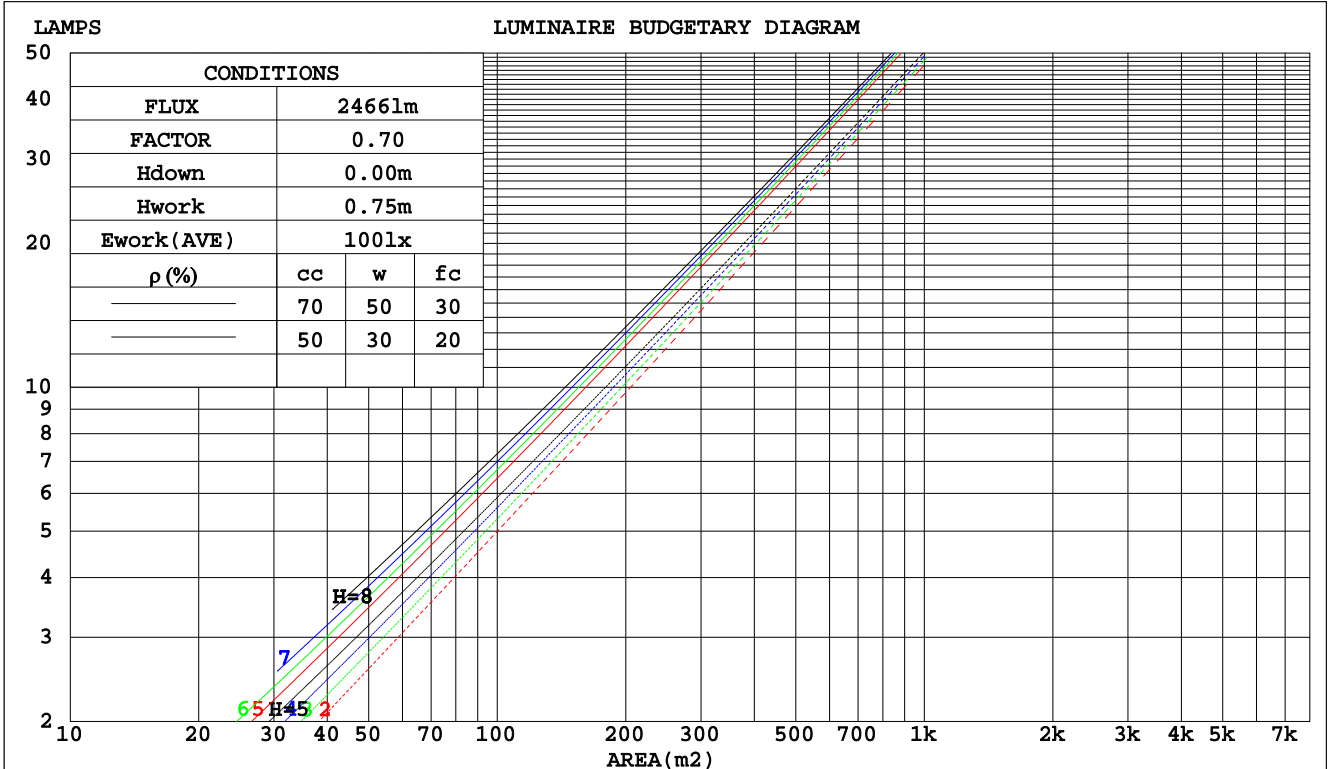

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz		
Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.142	.081	.026	.135	.077	.024	.123	.070	.022	.111	.064	.021	.101	.058	.019	
2.0	.132	.072	.022	.126	.070	.021	.116	.065	.020	.107	.060	.019	.098	.055	.017	
3.0	.123	.066	.020	.119	.064	.019	.110	.060	.018	.102	.056	.017	.095	.053	.016	
4.0	.116	.060	.018	.112	.059	.017	.105	.056	.017	.098	.053	.016	.092	.050	.015	
5.0	.110	.056	.016	.106	.055	.016	.100	.052	.015	.094	.050	.015	.089	.048	.014	
6.0	.104	.052	.015	.101	.051	.015	.096	.049	.014	.091	.047	.014	.086	.045	.014	
7.0	.099	.049	.014	.097	.048	.014	.092	.047	.013	.088	.045	.013	.084	.044	.013	
8.0	.095	.046	.013	.093	.046	.013	.089	.044	.013	.085	.043	.012	.081	.042	.012	
9.0	.091	.044	.012	.089	.043	.012	.086	.042	.012	.082	.041	.012	.079	.040	.012	
10.0	.088	.042	.012	.086	.041	.012	.083	.040	.011	.080	.040	.011	.077	.039	.011	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.014	
3.0	.136	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.124	.098	.078	.106	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.114	.086	.065	.098	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.105	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.092	.061	.040	.079	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.086	.056	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.070	.044	.027	.049	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.6	2.3	1.8	2.5	2.6	4.1	4.8	4.3	4.9	5.1
3H	1.5	2.1	1.7	2.3	2.5	3.9	4.6	4.2	4.7	4.9
4H	1.4	2.0	1.7	2.2	2.4	3.8	4.5	4.1	4.7	4.9
6H	1.3	1.9	1.6	2.1	2.4	3.8	4.3	4.0	4.6	4.8
8H	1.3	1.8	1.6	2.1	2.3	3.7	4.3	4.0	4.5	4.8
12H	1.2	1.8	1.6	2.0	2.3	3.7	4.2	4.0	4.5	4.7
4H 2H	1.4	2.0	1.7	2.2	2.4	3.8	4.5	4.1	4.7	4.9
3H	1.2	1.8	1.5	2.0	2.3	3.7	4.2	4.0	4.5	4.7
4H	1.1	1.6	1.5	1.9	2.2	3.6	4.1	3.9	4.4	4.7
6H	1.0	1.5	1.4	1.8	2.1	3.5	3.9	3.8	4.2	4.6
8H	1.0	1.4	1.4	1.7	2.1	3.4	3.8	3.8	4.2	4.5
12H	0.9	1.3	1.3	1.7	2.1	3.4	3.7	3.8	4.1	4.5
8H 4H	1.0	1.4	1.4	1.7	2.1	3.4	3.8	3.8	4.2	4.5
6H	0.9	1.2	1.3	1.6	2.0	3.3	3.6	3.7	4.0	4.4
8H	0.8	1.1	1.3	1.5	2.0	3.3	3.5	3.7	4.0	4.4
12H	0.8	1.0	1.2	1.5	1.9	3.2	3.4	3.7	3.9	4.4
12H 4H	0.9	1.3	1.3	1.7	2.1	3.4	3.7	3.8	4.1	4.5
6H	0.8	1.1	1.3	1.5	2.0	3.2	3.5	3.7	4.0	4.4
8H	0.8	1.0	1.2	1.5	1.9	3.2	3.4	3.7	3.9	4.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / -18.0					+ 3.8 / -18.8				
1.5H	+ 5.4 / -15.4					+ 6.2 / -16.7				
2.0H	+ 7.8 / - 9.8					+ 8.7 / -12.9				

CIE Pub.117, 2466 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.1)
Area: 0.0206015 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	91	85	82	91	85	82	90	85	82	79
0.80	98	93	90	97	93	89	96	92	89	86
1.00	102	97	94	101	96	93	99	96	93	89
1.25	105	101	98	104	100	97	102	99	96	93
1.50	108	104	101	107	103	100	104	101	99	95
2.00	110	106	103	108	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	110	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

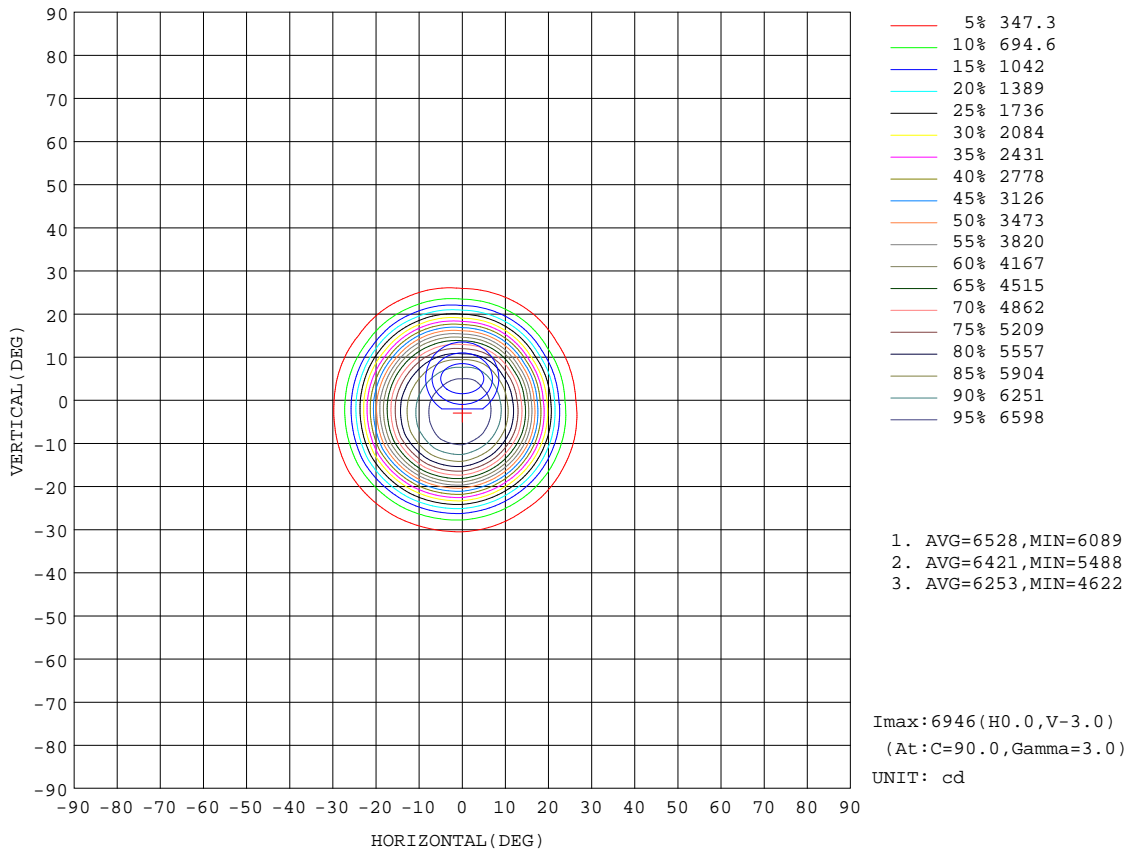


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:Jasoan
 Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity:58%
 Test Distance:9.322m [K=1.0000]
 Remarks:

AAI Figure

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		

Flux out:1795 lm

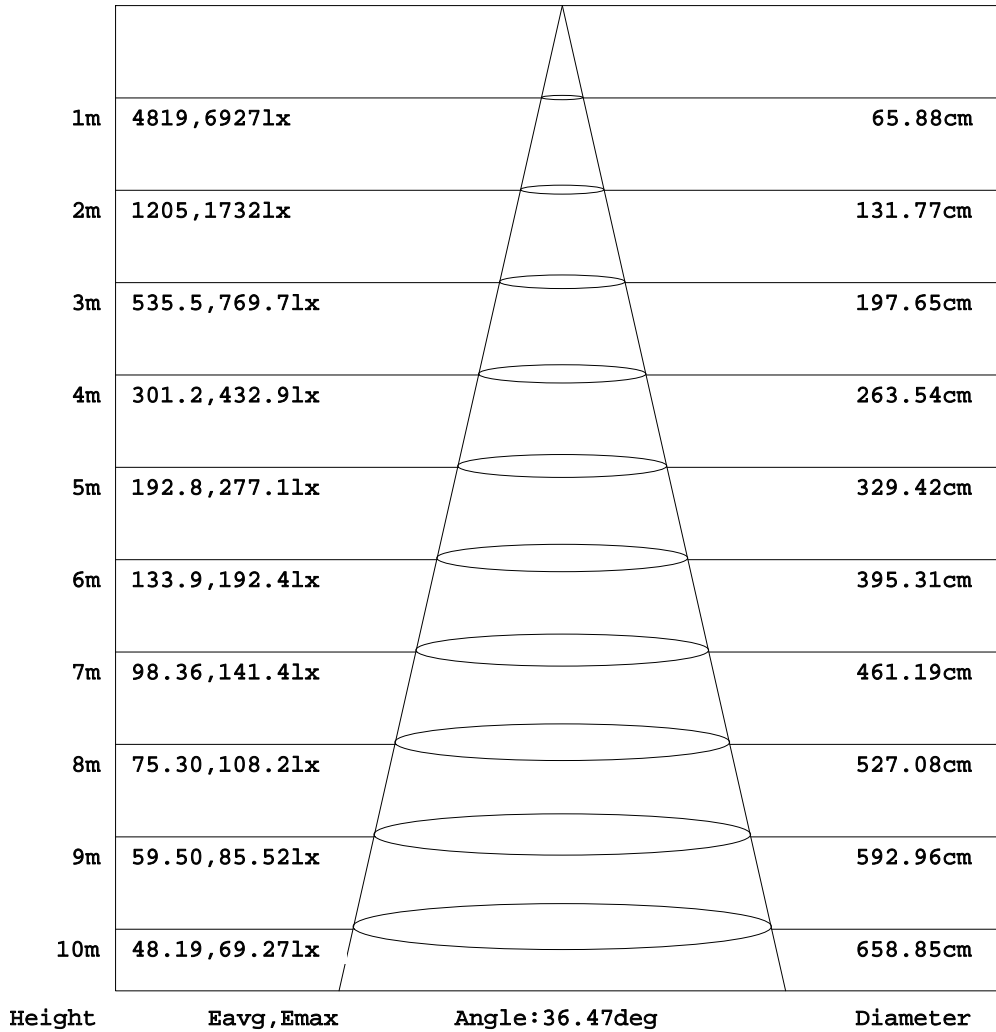


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-I4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

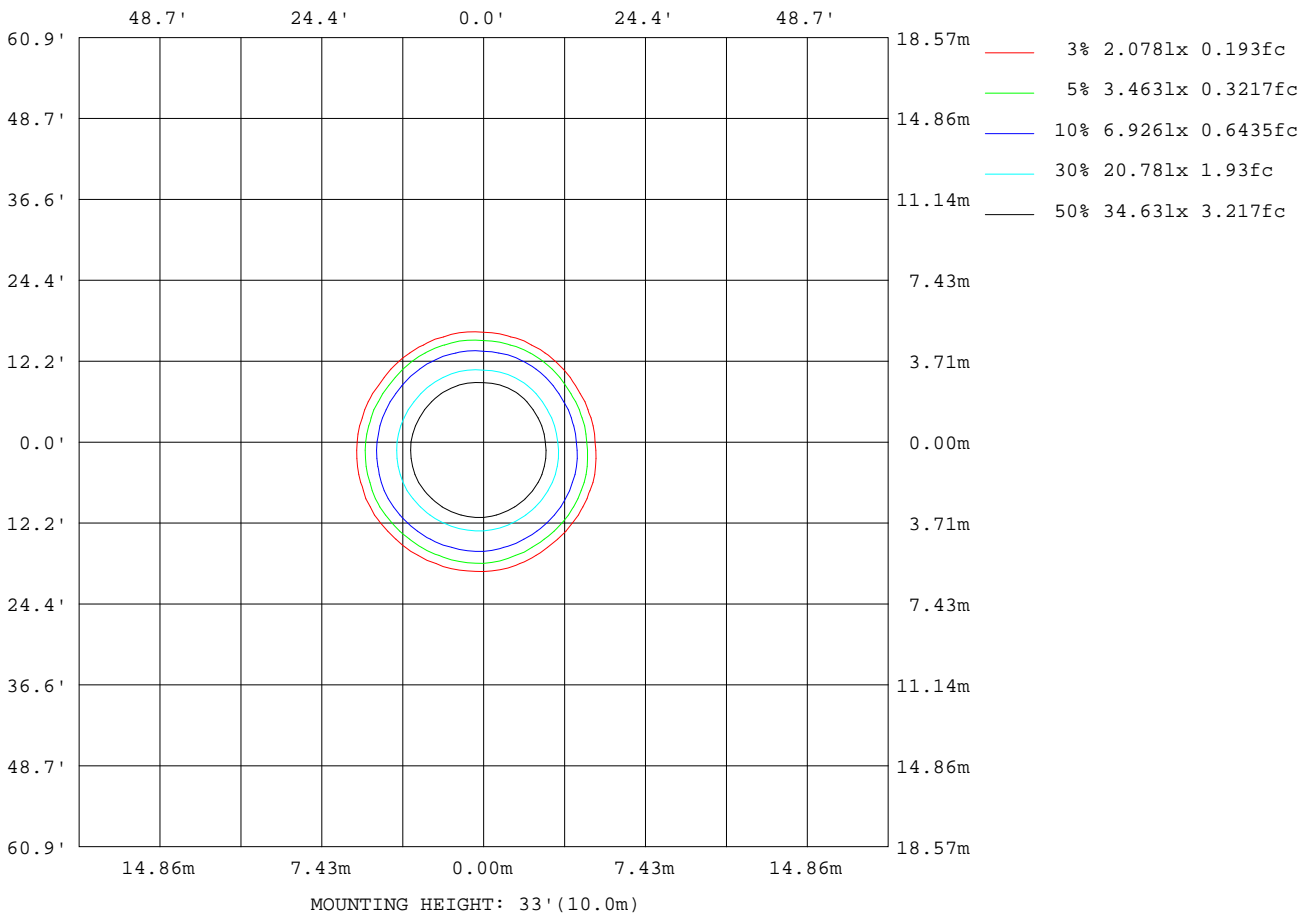

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: φ162mm*H188mm	
MFR.: SBC XICATO CORP.		


AvgL	cd/m2
L_0~180 (65) av	20
L_0~180 (75) av	22
L_0~180 (85) av	61
L_90~270 (65) av	18
L_90~270 (75) av	20
L_90~270 (85) av	56
L_45 (65) av	19
L_45 (75) av	19
L_45 (85) av	54

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:Jasoan
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity:58%
Test Distance:9.322m [K=1.0000]
Remarks:

Planar Illuminance Curve

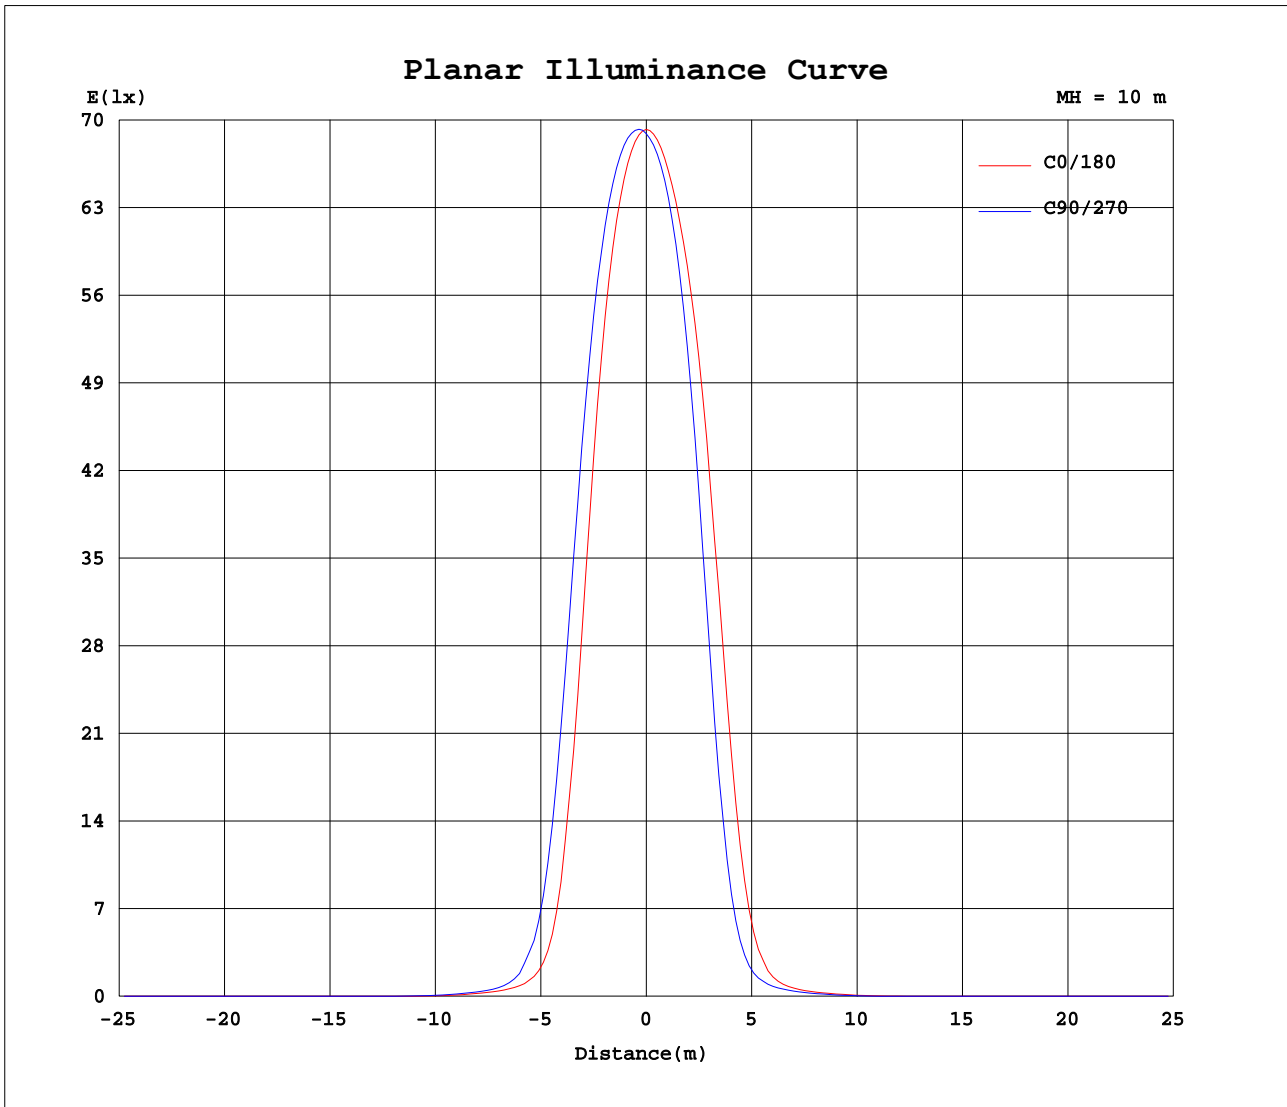

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: Jasoan
Test Date: 2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
Humidity: 58%
Test Distance: 9.322m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:26.500V I:1.0490A P:27.799W PF:1.0000 Freq:0Hz Lamp Flux:2466.12x1 lm		
NAME: XDL E6-WRA-L4X9030-36DW	TYPE: Downlight	SERIAL No.:
SPEC.: XTM Designer CRI 90 3000K	DIM.: ϕ 162mm*H188mm	
MFR.: SBC XICATO CORP.		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	6925	6912	6907	6891	6888	6875	6925	6912	6907	6891	6888	6875							
5	6731	6811	6885	6935	6897	6822	6771	6665	6621	6593	6637	6643							
10	5997	6265	6492	6641	6633	6489	6308	6087	5911	5760	5842	5839							
15	4270	4888	5337	5678	5783	5671	5325	4811	4357	3972	3986	3933							
20	1930	2522	3106	3665	3878	3862	3369	2636	2128	1713	1640	1612							
25	491	753	1053	1430	1603	1588	1242	834	599	444	433	399							
30	157	209	276	409	423	435	314	224	179	148	141	137							
35	78.4	94.2	107	127	138	140	119	99.9	86.9	76.1	72.6	70.0							
40	40.1	47.7	54.2	62.7	66.4	68.0	61.1	53.0	46.5	40.3	37.9	35.6							
45	11.9	15.6	18.9	23.1	25.6	29.1	25.1	20.7	17.5	13.3	11.4	9.90							
50	1.74	2.41	3.02	4.60	5.50	6.78	5.44	3.97	2.88	1.94	1.68	1.53							
55	0.99	1.09	1.26	1.36	1.47	1.43	1.28	1.24	1.05	0.95	0.87	0.85							
60	0.37	0.35	0.48	0.50	0.60	0.62	0.53	0.50	0.35	0.34	0.28	0.32							
65	0.21	0.15	0.20	0.14	0.21	0.14	0.14	0.19	0.11	0.17	0.14	0.19							
70	0.16	0.11	0.15	0.13	0.14	0.10	0.13	0.16	0.10	0.14	0.10	0.14							
75	0.11	0.11	0.12	0.12	0.11	0.10	0.12	0.11	0.10	0.10	0.10	0.10							
80	0.11	0.11	0.11	0.11	0.10	0.10	0.11	0.11	0.10	0.10	0.10	0.10							
85	0.11	0.10	0.10	0.11	0.10	0.10	0.11	0.10	0.10	0.10	0.10	0.10							
90	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.10	0.10	0.10	0.10	0.10							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: Jasoan
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.444
 Humidity: 58%
 Test Distance: 9.322m [K=1.0000]
 Remarks: